

House of Worship **Lighting Solutions**



CHAUVET
PROFESSIONAL

LED Moving Head Fixtures

Dynamic & Versatile

It's easy to see why more churches are adding moving head fixtures to their lighting systems. Today's moving head washes, spots and hybrids, like those in our Rogue and Maverick series, are quiet, compact and affordable. At the same time, they can also fill a variety of roles in your design, from accenting the architectural features of your church to lending a new dramatic dimension to services and special events.

“ I was blown away by how bright the Maverick fixtures were. The quality of light and effects they made were fantastic.”

- Tim Messina of Events United



Maverick Moving Heads



Maverick MK2 Profile

440 W LED with CMY flags and CTO flag + 13° - 37° Zoom Angle; 4 blade shutter framing system.



Maverick MK2 Spot

440 W LED with CMY flags and CTO flag + 13° - 37° Zoom Angle.



Maverick MK1 Spot

350 W LED with CMY flags and CTO Color Correction + 7° - 33° Zoom Angle.



Maverick MK3 Wash

27 40 W Pixel Mapping Osram RGBW LEDs + 7° - 45° Zoom Angle.



Maverick MK2 Wash

12 40 W Pixel Mapping Osram RGBW LEDs + 7° - 49° Zoom Range.



Maverick MK1 Hybrid

440 W Osram Lamp with CMY flags and CTO on Color Wheel + 3° - 18° (Spot mode), 2° (Beam mode), 19° - 41° (Wash mode).



Maverick MK Pyxis

9 15 W RGBW Outer Ring LEDs, 1 60 W RGBW Center Pixel LED + 7° - 45° Zoom Angle, 3° Center Pixel Beam Angle and 5° - 28° Outer Ring Beam Angle.

“

The Rogue fixtures give the church the flexibility to create a variety of different looks and do different things that engage people in new ways, not just at worship services, but also at youth events and concerts.”

- Duke DeJong, Vice President of Systems Integration at CCI Solutions



Rogue R3 Spot
300 W CW LED with 14 Colors +
13° - 37° Zoom Angle.



Rogue R2X Spot
300 W CW LED with 14 Colors.



Rogue R1X Spot
170 W CW LED with 8 Colors.



Rogue Moving Heads



Rogue R3 Wash

37 15 W RGBW quad-LEDs + 12° - 49° Zoom Angle.



Rogue R2 Wash

19 15 W RGBW quad-LEDs + 12° - 49° Zoom Angle.



Rogue R1 Wash

7 15 W RGBW quad-LEDs + 11° - 48° Zoom Angle.



Rogue R2X Beam

231 W Osram Sirius lamp with 14 Colors + 1° Beam Angle.

Coming Soon



Rogue RH1X Hybrid

371 W Osram Sirius Reflector lamp with 13 Colors + 5° - 19° (Spot mode), 2.5° - 8° (Beam mode), 18° - 38° (Wash mode).



Rogue R1 FX-B

5 15 W pixel mappable RGBW LEDs.

LED Stage Lighting

Engaging & Efficient

Save energy, lower utility costs and eliminate costly lamp replacements by moving from your old incandescent system to our award-winning Ovation series of LED solutions. Also, since LED fixtures produce less heat, it will win you friends, by making your pastor, choir members and others who participate in services far more comfortable! Sleek and discrete, these units are specifically designed for applications where silent operation is critical.

“ We wanted fixtures with the output that could give us the coverage we needed in a large area and would also deliver good color quality.”

- Mark Pearson from CCI



Ovation Ellipsoidals



Ovation E-910FC

91 LEDs 3 W each, RGBA+Lime.

* Equipped with a Virtual Color Wheel that matches popular gel colors when projected by a tungsten source.

* Available black or white housing.

WHY LIME LEDs?

Lime fits optimally in the wave length that the human eye sees best resulting in superior color blending, even in the most subtle hues, plus brighter output of colors – and whites at every color temperature.



Color Temperature Range



2800 - 8000 K

Ovation E-930VW

91 LEDs 3 W each, Variable White.

* Each color temperature can be further adjusted for +/- green to perfect the field of light.

2016 New Product Awards Winner 



Ovation E-260WW

1 LED 230 W, Warm White.

* Available black or white housing.



The "D" is for Dimming.

Smart auto sensors adapt and respond to either conventional dimmers or constant power with DMX.

Ovation ED-200WW

1 LED 230 W, Warm White.

* True retrofit solution.



Ovation E-160WW

1 LED 88 W, Warm White.

Ellipsoidals Accessories



• Available in 14°, 19°, 26°, 36° and 50°.



• Available in 15° - 30° and 25°-50°.




Metal/Glass Gobo Holders



20-Leaf Iris


Ovation HD Lens Tubes

All of our lens tubes feature dual aspheric lenses that provide precise focus for crisp gobo projection, integrated gel frame holders with included gel frame, and are rated for outdoor use.

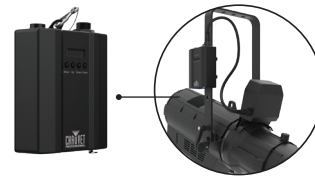

Ovation GR-1 Adapter

Allows the outdoor rated Ovation GR-1 IP gobo rotator to function with any ERS-style fixture.

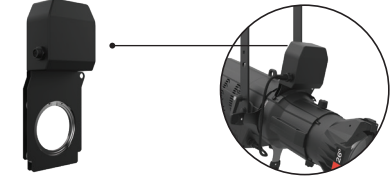

Ovation GR-1 IP

The Ovation GR-1 IP is an IP65 rated gobo rotator for the Ovation E-260WW IP and Ovation E-910FC IP.



Ovation E-260CW

1 LED 230 W, Cool White.



Ovation MIN-E-10CW / WW

1 LED 13 W, Cool White / Warm White.

19° - 36° zoom.

Ovation Fresnels

8" Class



Ovation F-915FC

89 LEDs 3 W each, RGBA+Lime.

30° - 85° motorized zoom.

* Virtual Color Wheel has been added to match popular gel colors.

Color Temperature Range



2800 - 8000 K



Ovation F-915VW

89 LEDs 3 W each, Variable White.

30° - 85° motorized zoom.

* Each color temperature can be further adjusted for +/- green to perfect the field of light.



Ovation F-265WW

1 LED 230 W, Warm White.

27° - 68° motorized zoom.



The "D" is for Dimming.

Smart auto sensors adapt and respond to either conventional dimmers or constant power with DMX.

Ovation FD-205WW

1 LED 230 W, Warm White.

20° - 72° motorized zoom.

6" Class



Ovation F-415FC

46 LEDs 3-5 W each, RGBA+Lime.

27° - 68° motorized zoom.

* Virtual Color Wheel has been added to match popular gel colors.

Color Temperature Range



2800 - 8000 K



Ovation F-415VW

46 LEDs 3-4 W each, Variable White.

27° - 68° motorized zoom.

* Each color temperature can be further adjusted for +/- green to perfect the field of light.



The "D" is for Dimming.

Smart auto sensors adapt and respond to either conventional dimmers or constant power with DMX.

Ovation FD-105WW

1 LEDs 80 W, Warm White.

14° - 63° manual zoom.



Ovation F-145WW

1 LED 70 W, Warm White.

25° - 65° motorized zoom.

3" Class



Ovation F-55FC

15 LEDs 3-4 W each, RGBA+Lime.

32° - 87° manual zoom.

* Virtual Color Wheel has been added to match popular gel colors.



Ovation F-55WW

1 LED 37 W, Warm White.

30° - 70° manual zoom.



The "D" is for Dimming.

Track-mounted for conventional dimming.

Ovation FTD-55WW

1 LED 37 W, Warm White.

30° - 70° manual zoom.


Fresnels Accessories



Ovation F 3.5" barn door



Ovation F 6.25" barn door

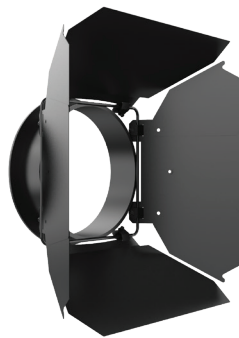

Ovation F 7.25" barn door



Optional Ovation 60 deg, 75" Honeycomb

Barn Doors

All of our Ovation barn doors eliminate light leaks and minimize spillage.



As we have the Fresnels positioned, the church can cover any area of the room with only four units."

- Clint Hill of Sweet Southern Sound

Ovation Battens



Ovation B-2805FC

69" batten with 280 3 W LEDs, (60 red, 60 green, 60 blue, 40 amber, 60 lime).

* Virtual Color Wheel.



Ovation B-1965FC

48" batten with 196 3 W LEDs (42 red, 42 green, 42 blue, 28 amber, 42 lime).

* Virtual Color Wheel.



2017 New Product Awards Winner



Ovation B-565FC

13.9" batten with 56 3 W LEDs (12 red, 12 green, 12 blue, 8 amber, 12 lime).

* Virtual Color Wheel.

Included holographic filters easily lock into place for use in cyc lighting and wall grazing, and each batten offers 16-bit dimming and adjustable PWM.



Ovation House Lights



Ovation H-605FC

60 LEDs 3 W each, RGBA+Lime.

* Included removable yoke for mounting as a down light pendant, or clamp to a pipe/truss to use as a general area wash or directional flood.

* Available black or white housing.

* Virtual Color Wheel.



Ovation H-265WW

1 LED 230 W, Warm White
3200 K Color Temperature.

* Included removable yoke for mounting as a down light pendant, or clamp to a pipe/truss to use as a general area wash or directional flood.

* Available black or white housing.



Ovation Wash Lights



Ovation P-56FC

48 LEDs 3-5 W each, RGBA+Lime.

* Virtual Color Wheel has been added to match popular gel colors.



Color Temperature Range



2800 - 8000 K

Ovation P-56WW

48 LEDs 3-4 W each, Variable White.

* Each color temperature can be further adjusted for +/- green to perfect the field of light.



Ovation P-56WW

1 LEDs 230 W, Warm White.



Ovation P-56UV

1 LED 114 W, UV.

* True UV light with minimal projected visibility.

All of our Ovation 7.5" beam shaping accessories eliminate leaks and spillage from pars.

LED Color Washes

Warm & Genuine

Producing rich and vibrant colors, our LED washes can contribute to the creation of a welcoming and engaging environment at your church. A variety of fixture personalities, infinite color options and excellent dimming curves make it easy to reflect the various themes conveyed at different points during services.

““ The zoom function on the COLORados makes it easy to move from a general wash look to a very narrow special,” he said. “The zooming, plus the smooth dimming, has made them invaluable.”

**- Ken Patterson, Owner of A
Tennessee Lighting Company
in Knoxville**



COLORado Washes



COLORado 3 Solo

3 60 W RGBW LEDs wash light,
8° - 45° Zoomable optics.



COLORado 2 Solo

3 40 W RGBW LEDs wash light,
7° - 42° Zoomable optics.



COLORado 1 Solo

1 60 W LED wash light,
8° - 55° Zoomable optics.



COLORado M Solo

1 40 W LED compact wash light,
5° - 24° Zoomable optics.

COLORado Battens



COLORado Solo Batten

144 3 W RGBWA LEDs.

* Each color temperature can be further adjusted for
+/- green to perfect the field of light.



LED Video Panels

Clear & Bright

Whether you're displaying inspiration text and images, or showing live video feeds, our flicker-free LED video panels have the resolution and brightness to deliver a positive viewing experience to worshippers regardless of where they're seated in your sanctuary. We offer a complete range of video solutions.

“ When we aren't using video, we simply display that image of our normal brick wall on the panels and have them 'disappear' by blending with the building. The clarity of the video panels' images allows us to do this plan”

**- Heath Ramsey,
Technical Director**



F Series Video Panels



F3

3.9 mm pixel pitch 1 m x 0.5 m LED video panel with a refresh rate of 3,840 Hz + front and rear serviceable due to its magnetic LED modules.



F4 IP

4.8 mm pixel pitch LED video panel with 1921 SMD LEDs on a 3,840 Hz refresh rate + front and rear serviceable due to its magnetic LED modules. IP65 rated.

F Series Accessories



Road Case

All video panels are supplied in four pack road cases.



MT-03

Magnetic tool used for LED module removal on F3 video panels.



F Series Rig Bars

Available for hanging F Series video panels from truss or pipe.



VIP Drive 43Nova

Stream all in one video wall mapper/scaler. For use with the Novastar video protocol. Compatible with F3 and F4 IP video panels.

LED Pixel-Mapping

Sizzling & Unique


Enrich the stage and draw your audience in with powerful and sizzling pixel mapping displays. In today's fast-paced real-time world, keeping people's attention can be a challenge. The CHAUVET Professional Épix series provide eye-popping images to keep everyone's attention.

“ These fixtures are popular with a lot of churches like Hillcrest that hold different types of services. I appreciated the fixtures for this Christmas concert, because I could change up the look a lot to keep the visuals interesting.

**- Craig Rutherford,
Lighting Designer**



Épix Series





Épix Strip IP

39.3" strip with 100 pixel mappable RGB LEDs in one row.



Épix Strip IP 50

19.6" strip with 50 RGB pixel mappable LEDs in one row.

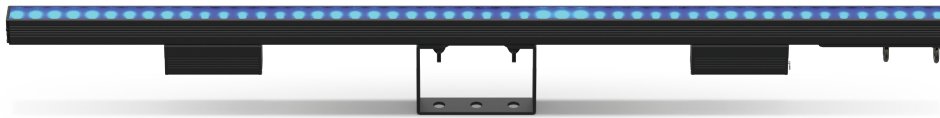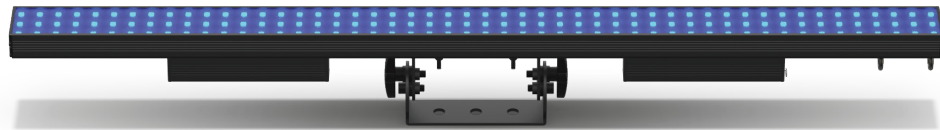

Épix Bar Tour

39.4" strip with 150 RGB pixel mappable LEDs arranged in three rows.

Épix Strip Tour

39.4" strip with 50 RGB pixel mappable LEDs in one row.

Épix Strip Tour 50

19.6" strip with 25 RGB pixel mappable LEDs in one row.




Épix Drive 2000 IP

Hosts the processing and power supply for the Épix IP and Tour system.



Épix Drive 900

Hosts the processing system and power supply for the Épix Tour system.

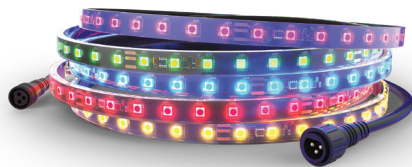

Épix Flex 20

5 meter flexible strip with 240 RGB pixel mappable LEDs.



Épix Flex Drive

Controls the Épix Flex 20 with 2 plug and play outputs that drive up to 4 Épix Flex 20 at 960 LEDs each.




Épix Flex Boost

24V in-line voltage booster that doubles the capacity of each output on the Épix Flex Drive to 1920 LEDs or 8 Épix Flex 20.

Networking and Distribution

Reliable & User-Friendly

Easily configure and maintain your worship center's lighting systems with these powerful DMX, RDM and Ethernet-based networking solutions.

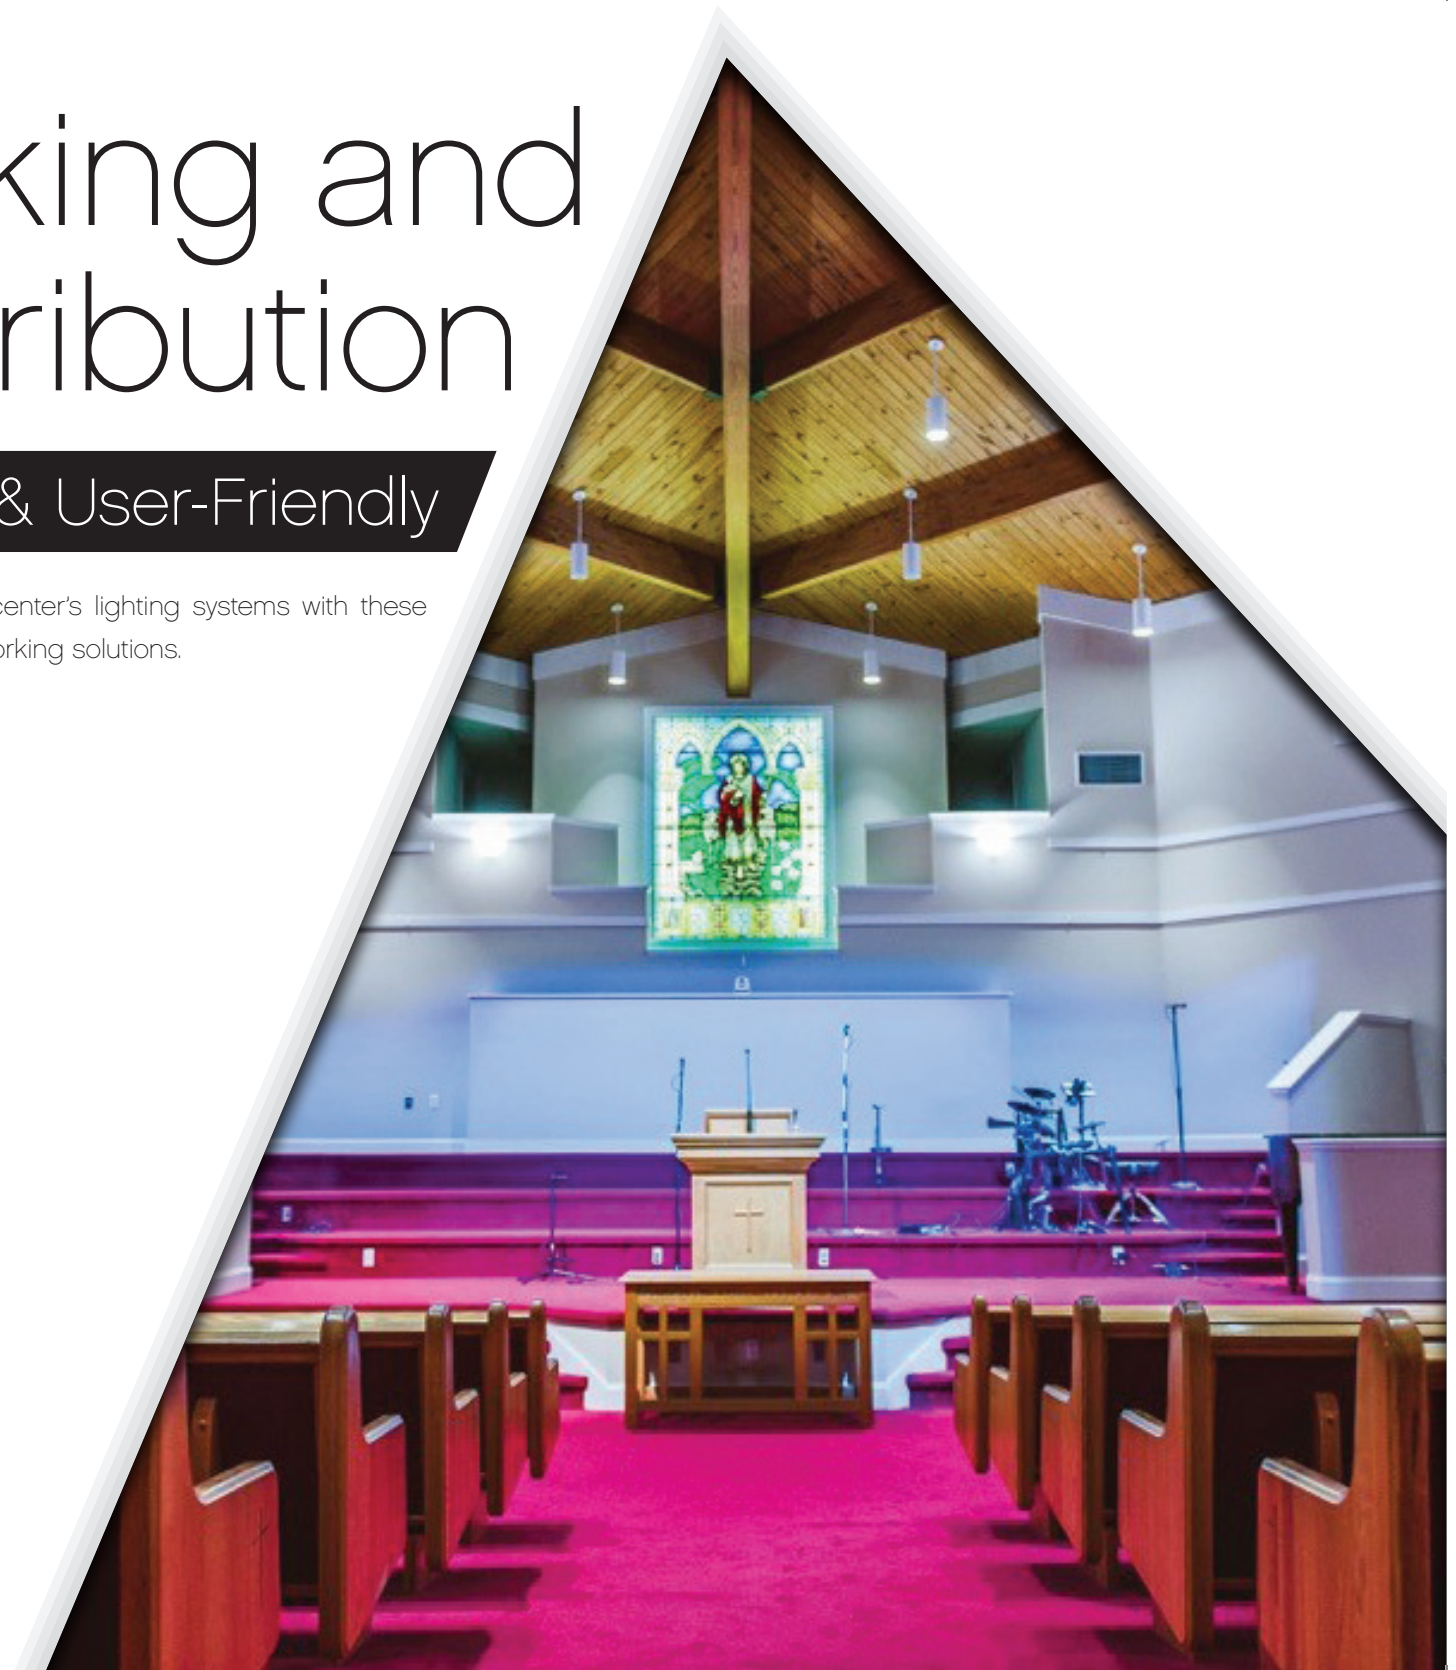

ChamSys

MagicQ MQ80

RDM Enabled Console.



Net-Switch

Reliable network switch with 48 GB throughput for immediate response with no delays 8 outputs of ArtNet, sACN, Kling-net.



Net-X II

Powerful DMX to Ethernet (ArtNet, sACN, Kling-net) node with a backup DMX recorder 8 outputs of DMX: 8 universes.




RDMX Splitter 8

Rugged, RDM compliant DMX splitter 1 in 8 outputs of DMX: 1 universe 2 in 4 outputs of DMX: 2 universes.



Synapse 4

Intelligent relay pack that prolongs your fixture lifespan.

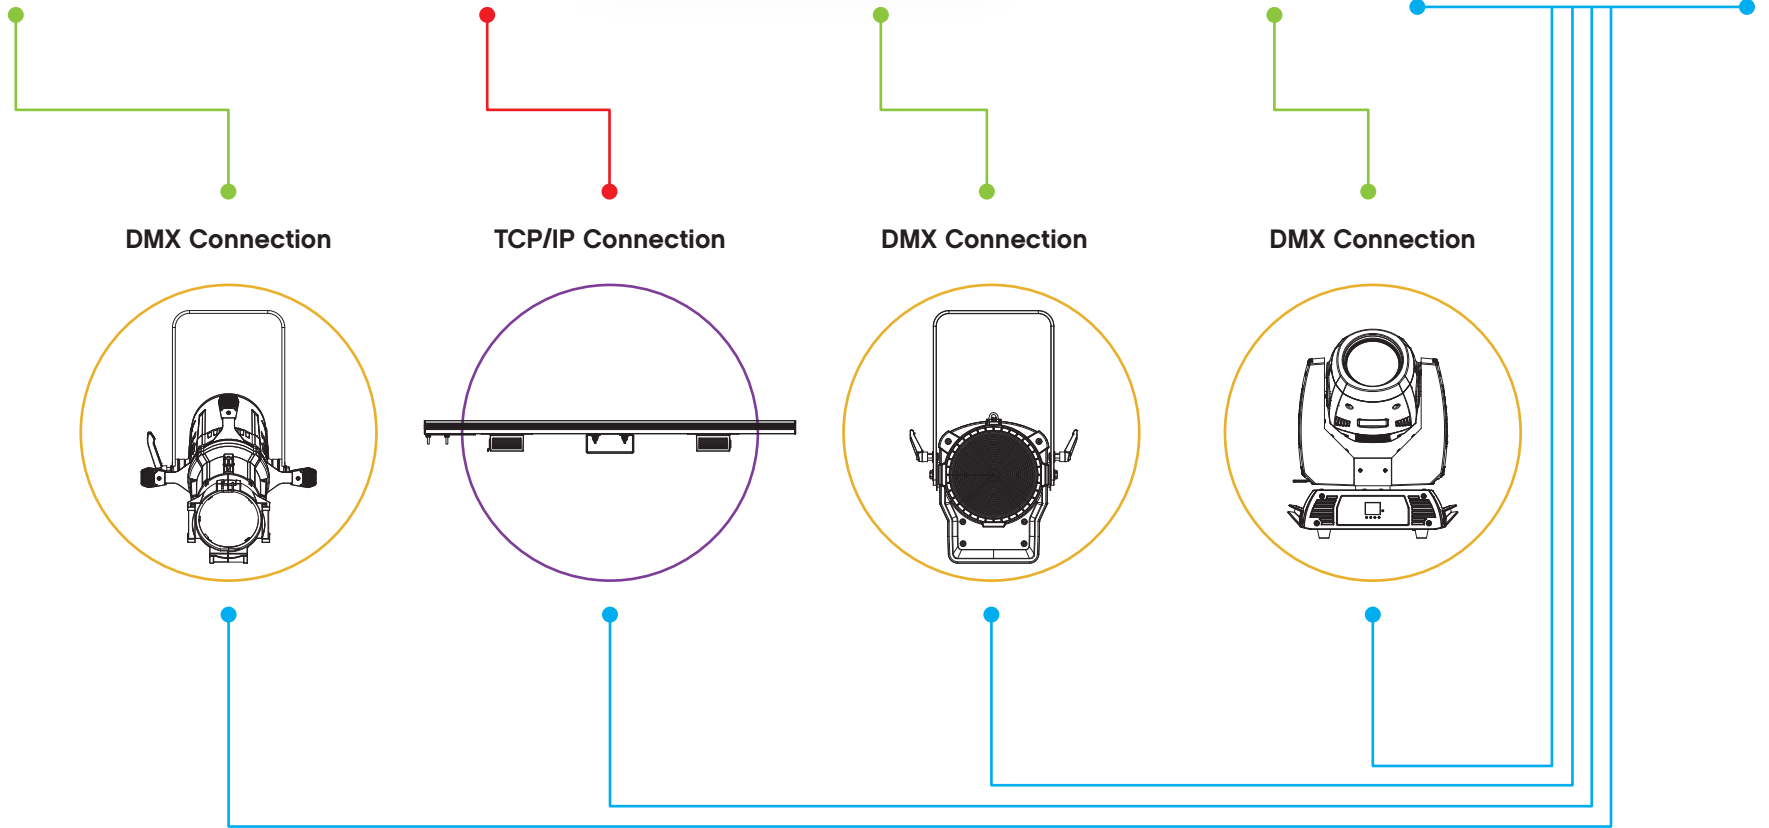

DMX Connection

TCP/IP Connection

DMX Connection

DMX Connection

Power Cable

Key

Ethercon, (ArtNet, sACN, Kling-net) Cable — DMX Cable — Power Cable — TCP/IP Connection — DMX Connection —



CONTACT US

GLOBAL HEADQUARTERS

5200 NW 108th Avenue
Sunrise, FL 33351 USA

CALIFORNIA BRANCH

7555 N. San Fernando Road
Burbank, CA 91505
USA

MEXICO BRANCH

Av. de las Partidas 34 - 3B
(entrada por Calle 2) Zona
Industrial Lerma
Lerma, Edo. de México, CP 52000
México

GERMANY BRANCH

Bruno-Burgel-Str. 11
DE-28759 Bremen
Germany

BELGIUM BRANCH

Stokstraat 18
9770 Kruishoutem
Belgium

FRANCE BRANCH

3, rue Ampère
91380 Chilly Mazarin
France

UK BRANCH

Unit 1C Brookhill Road
Industrial Estate
Pinxton, Nottingham
NG16 6NT
United Kingdom



chauvetprofessional.com